


UH-1...

When to Take It All Off

Never use solvent to clean your Huey's drive shaft hanger assemblies, bird mechs—not while they're installed on your bird.

Solvent will ruin the grease that keeps those hanger bearings friction free.


The only way to clean installed hanger assemblies is to wipe away excess grease

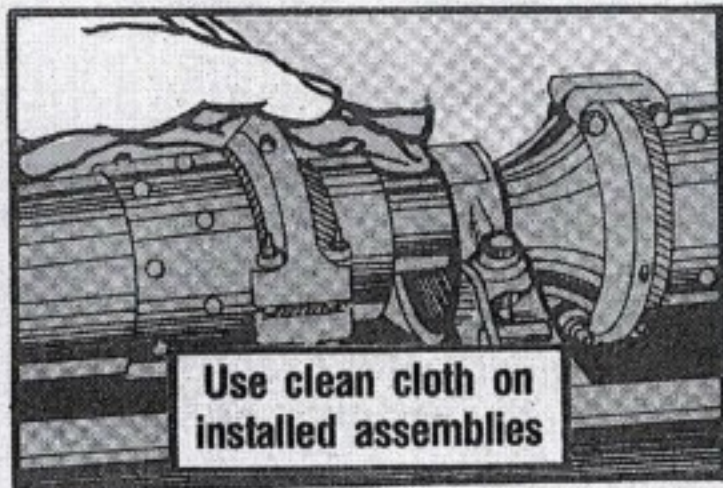

and crud with a clean, lint-free cloth.

Solvent may be used to clean couplings if couplings are removed from the aircraft and completely disassembled, then dried with filtered, dry, compressed air. If couplings are not completely disassembled,

or are installed, solvent may not be used.

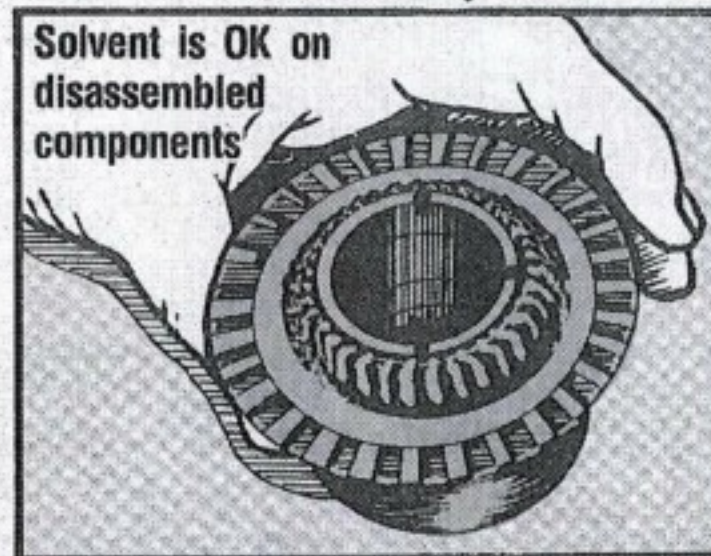

Just make sure you get all the solvent off the assembly before you repack it with grease, NSN 9150-00-506-8497. Use compressed air to remove the last of the solvent.

'Course, any time you work with a solvent, you must wear protective clothing and gloves, as well as a face shield or goggles. And if you have to work in a poorly ventilated area, you need a respirator. Check with the medics to make sure you have the right respirator.