




There are 2 ways you can use your Vibrex equipment for dynamic tracking and balancing your UH-1 tail rotor blades.

1. Temporarily add the required weight to the 4 blade bolts.
2. Permanently install balance arm kit, NSN 1615-01-079-6378.

Adding 2 cord-wise arms to the trunnion cap bolts and 2 span-wise arms to the blade bolts is the best deal. They remain in place, except during a static balance job, to save you time and elbow grease.

Installing the arms in the field is a breeze. Just follow the installation poop that comes with the kit.

When using the balance arms, be sure you use balance chart, PN 4020,

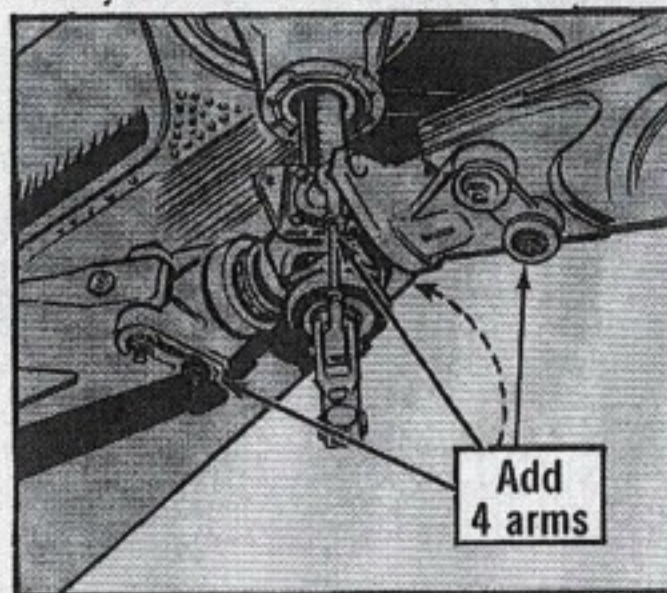

NSN 7610-01-123-3223. If you use balance weights, use chart, PN 3413, NSN 7610-01-123-3222.