



# TIME

Installing the top plug is a breeze.  
We use the aluminum to cover the  
openings in the particle separator.

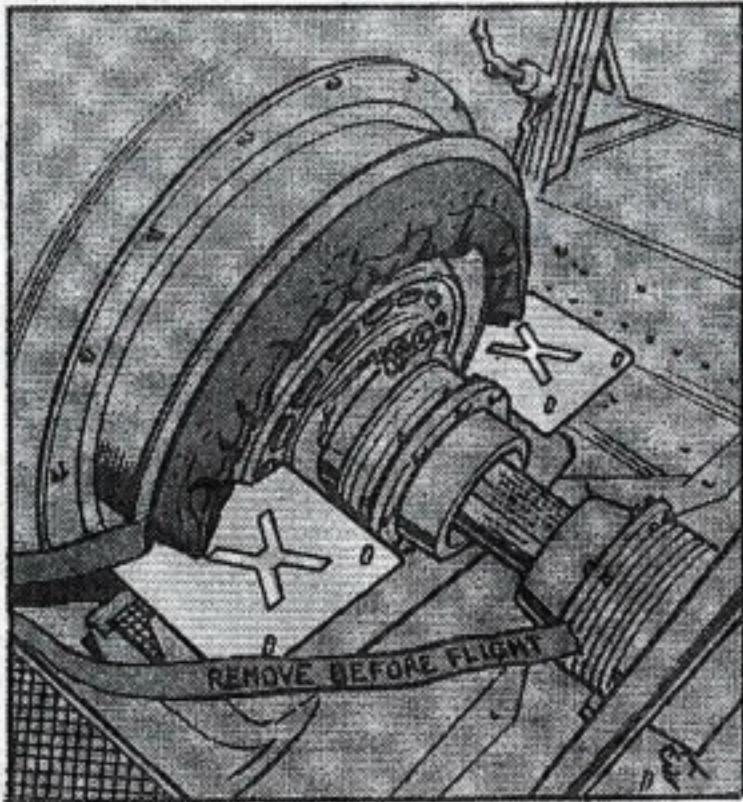

When the whole particle separator  
is removed, just insert both plugs.

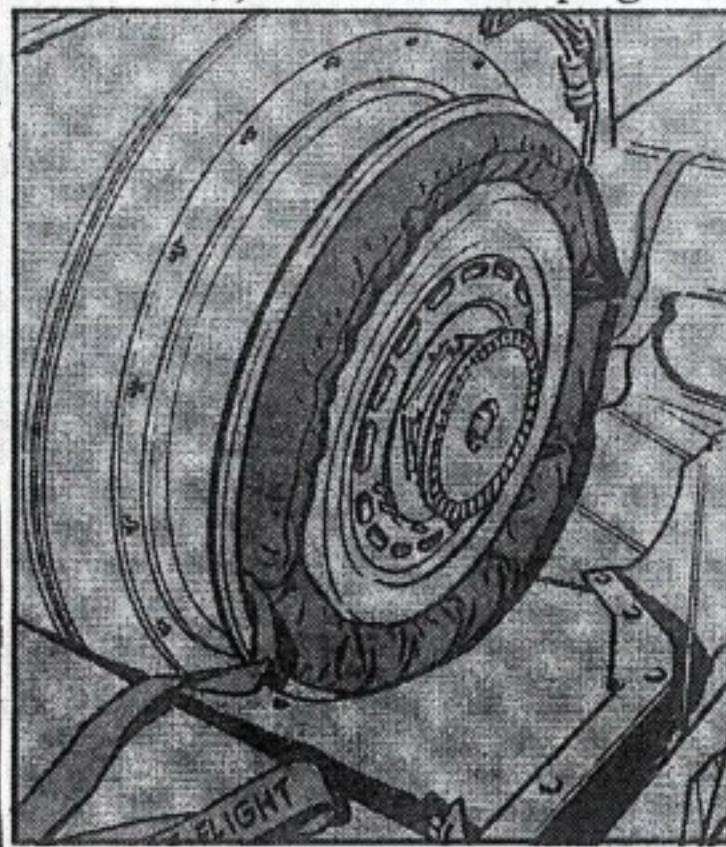

Gerald R. Willman  
Mather AFB, CA

*(Ed Note—Right! This is a fine way to cut down on FOD.)*