


Step Back to Seal



If you're installing a Huey input drive quill because your old one leaked, take a step back to make sure your new one doesn't.

Before you do Step 6-108g of TM 55-1520-210-23-1, lubricating the new preformed packing, slide back to Step 6-107, the assembly of the input drive quill. Follow the instructions for lubricating the seal, Item 10 of Fig 6-26.

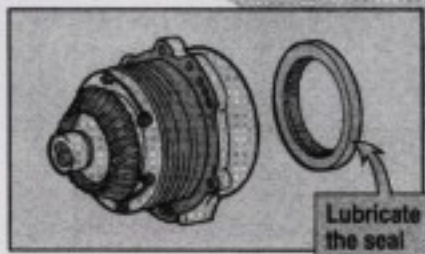

To do it, you'll have to remove the freewheeling clutch assembly like it says in Step 6-103.

Once you've got the new seal lubed, finish installing your input drive quill.

Stepping back will cost a little time and effort now, but it will save big repairs in the future.