

Huey Hydraulics . . .

Head Off Hose Woes


Chafed or twisted hydraulic hoses and tubes have to be replaced . . . every time.

So save yourself extra work, Huey mechs, by paying better attention to those hydraulic lines.

Take, for example, the hoses that attach to the cyclic control irreversible valve. When removing or installing them, use two wrenches to tighten each hose. That will keep the hose from kinking, twisting or breaking internally.

Two wrenches will help you seat the fittings and avoid leaks when the lines are under pressure, too.

Last—but not least—that second wrench will hold the hose away from other hardware that could rub it the wrong way.

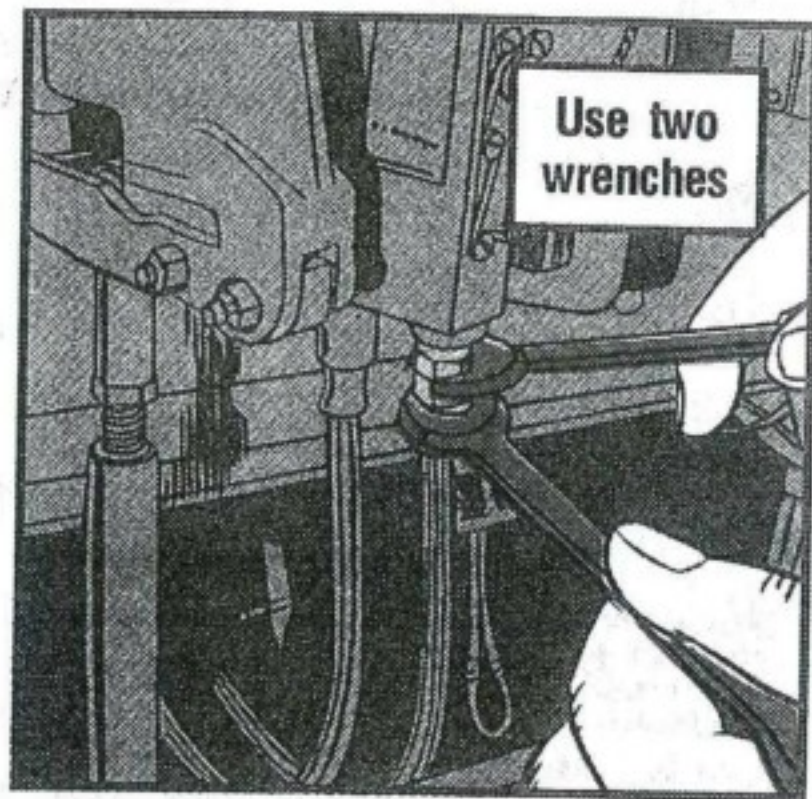

If you find a hose or tube that you can't keep from rubbing against something, spiral wrap it with tape, NSN 7510-00-923-0591.